


THURSDAY POOLS

Your weekend starts early with us

Aspen 1640

Depth: 3'-4" to 5'-10"

Typical Overdig approx 1' If using FPA (Fiberglass Pool Anchor System) 20" to 24"

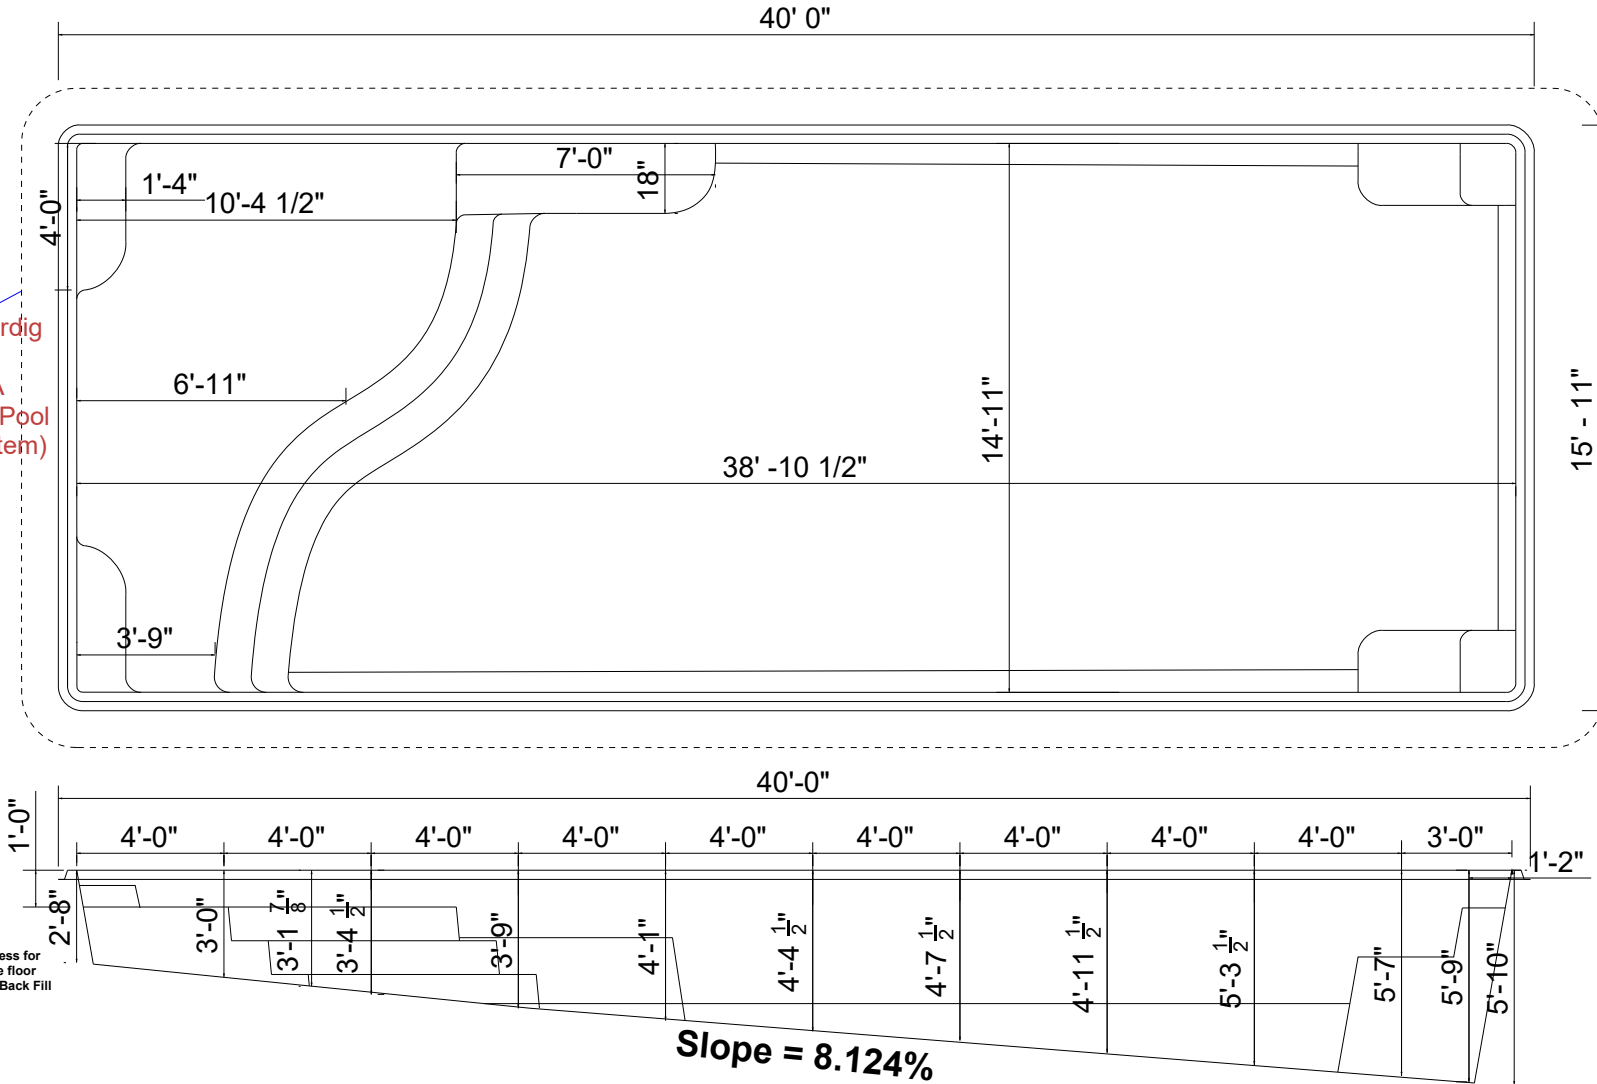

Note: add 1" thickness for tanning ledge floor without BFE Back Fill Eliminator

(Add approx. 1/4" for fiberglass floor thickness and 1" for sun deck)

PLEASE SEE GENERAL CONSTRUCTION AND RECOMMENDED INSTALLATION NOTES
NON DIVING POOL

SPECIFICATIONS:	
Volume:	13,090 gal (est)
Weight:	2,800 lbs (est)
Area:	580 sq. ft. (est)
Perimeter:	108' (est)
SCALE:	

CONTROL	
Meets Test Criteria	Confirmed Act Dim
WHK 2/25/17	WHK 3/16/17
	Confirmed Dig Specs
	JH 2/1/18

THURSDAY POOLS LLC
your weekend starts early with us . . .
840 Commerce Parkway
Fortville, Indiana 46040
Note: for technical help please call Thursday Pools LLC at
Toll Free (877) 929-POOL (7665)
Local (317) 973-0200

To be filled out by Pool Dealer
POOL NAME: Aspen 1640
OWNER:
ADDRESS:
POOL DEALER:

To be filled out by LC
Date: 3/29/22
Job No.
File No.
Sheet No. D8
Revision No. 01

*All depths reflect the depth of the pool structure.
Water depths may vary depending on the amount of water in the pool.

This NOTICE AND DISCLAIMER is made to all retail customers, buyers, and end users of pools manufactured by Thursday Pools. You are by this NOTICE advised that pools manufactured by Thursday Pools (the "MANUFACTURER") are sold by independent dealers and dealerships. Each dealer is an independent businessperson who is completely separate from the MANUFACTURER. Each dealer is an independent contractor, and no dealer is an owner, agent (in fact or law), or employee of the MANUFACTURER. The MANUFACTURER hereby DISCLAIMS any liability for an intentional or negligent act by any dealer, dealership, or installer, or any damage to any Thursday Pools pool caused by an act of any dealer, dealership, or installer.

General Tolerance +/- 1/2"